B3A (3 AXLES TIPPING SEMI-TRAILERS Hardox 5 mm)

- Tridem Mechanic
- Patented multiconic shape
- 30 m^3
- Hardox 450
- Stabilizer system
- Tare approx.:
    - 5mm - 7900 Kg
    - 8mm - 9100 Kg
    - 6/4mm - 8600 Kg
    - 8/6mm - 9500 Kg

HIGH TENSILE STEEL CHASSIS

- 2 Automatic welded main beams linked by cross bars
- Dismountable 2" king pin
- Mudguards
- Rear bumper

TIPPING DEVICE

- Front end cylinder with pressure valve

LANDING GEAR

- 2 Speeds telescopic self compensated

ROLLING EQUIPMENT

- Reinforced tridem mechanical suspension
- 3 Axles SAF for twin wheels
- Drum brakes Ø 420x200
- 12 Tires 12 R 22,5 or 13 R 22,5 CONTINENTAL

BRAKING SYSTEM

- Two lines with load corrective valve
- Pneumatic parking brake (Maxibrake) on rear axle

LIGHTING AND SIGNALLING

- Two rear lights with 9 functions
- Front and lateral reflectors

STEEL BOX “XK” IN HARDOX 450

- Floor, sides, front panel and rear door made of steel HARDOX 450 in 5 mm
- Rear door with automatic opening with double hinge
- Stabilizer between body and chassis
- Lateral staircase

OTHER EQUIPMENT

- Tools box 600x400x500 mm
- Spare wheel support
- Spare tire 12 R 22,5 or 13 R 22,5

PAINT WORK

- Shot blasting, primary and 2 components final painting
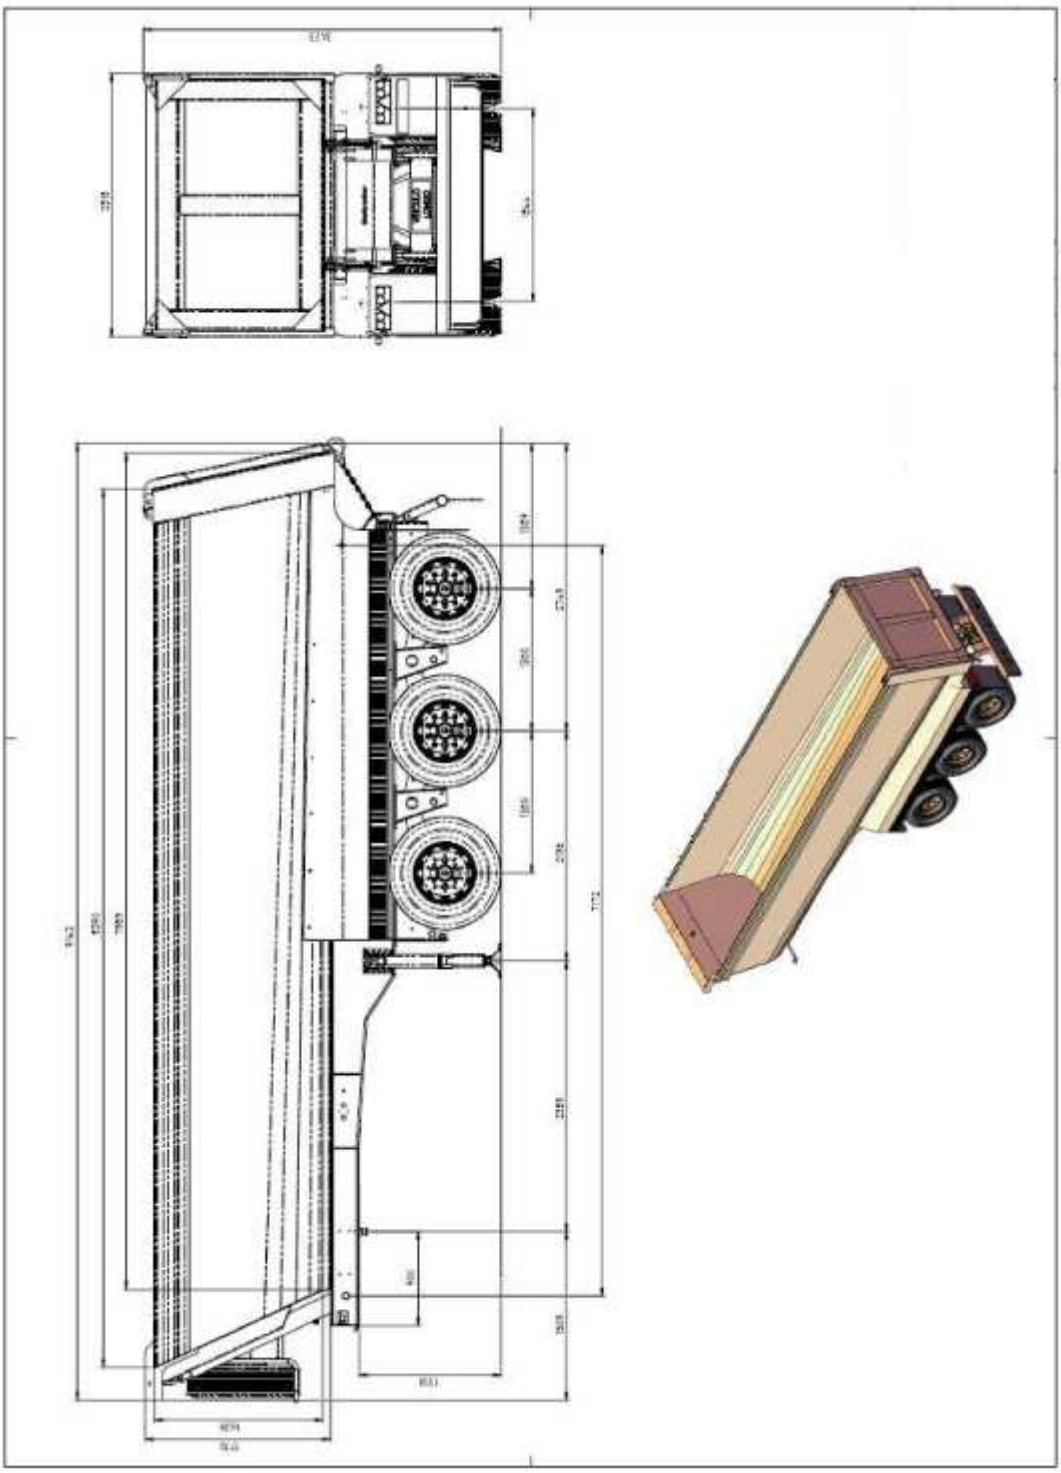
OPTIONS
Box in HARDOX 8 mm Multiconic shape (more)
Box in ST 52, bottom 6mm, sides 4mm, square shape (less)
Box in ST 52, bottom 8mm, sides 6mm, square shape (less)